

modelo
model

S-1

Capacidad: 30 – 50 – 75 – 100 – 150 kg
Capacity:




3000 divisiones OIML-R60
3000 divisions OIML-R60

Soporte elástico de acero aleado
Measuring element from steel alloy

Tratamiento anticorrosión de níquel químico
Protected against corrosion by nickel-plated treatment

Disponible en acero inoxidable
Available in stainless steel

Estanqueidad IP-67
Protected against humidity IP-67

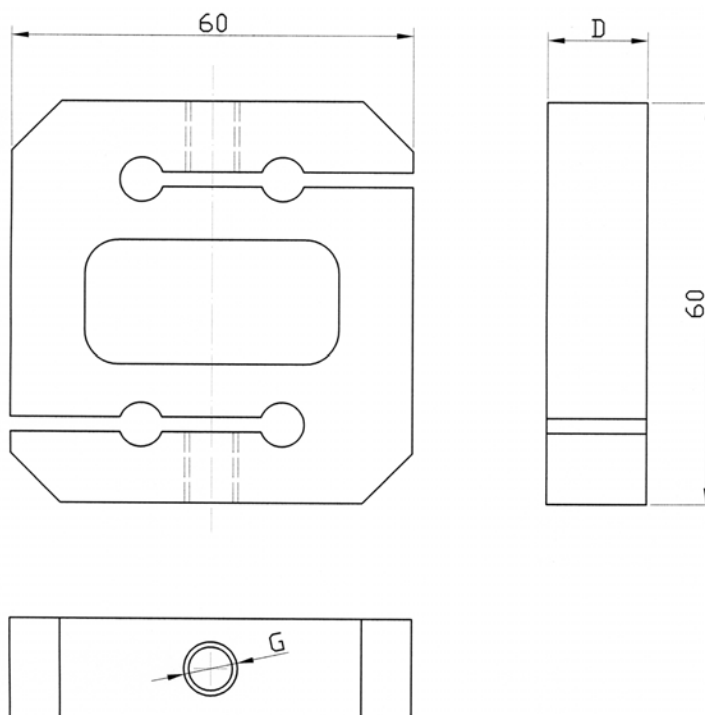

Capacidad	30 kg	50 kg	75 kg	100 kg	150 kg
G	M8	M8	M8	M8	M8
D	15	15	15	15	20

Características técnicas:

- Clase de precisión
- Sensibilidad
- Vmin
- Tensión de alimentación
- Resistencia de entrada
- Resistencia de salida
- Margen de temperatura compensado
- Resistencia de aislamiento


Dimensiones en mm

C3
 $2 \pm 0.1\% \text{ mV/V}$
Emax/10000
 $5 \pm 15 \text{ V}$
 $350 \pm 3 \Omega$
 $350 \pm 3 \Omega$
 $-10^\circ\text{C} / +40^\circ\text{C}$
 $> 5000 \text{ M}\Omega$

Technical Data:

Accuracy class -
Rated output -
Vmin
Excitation Voltage -
Input Resistance -
Output resistance -
Temperature limits OIML R60 -
Insulation resistance -

Conexión/Connections

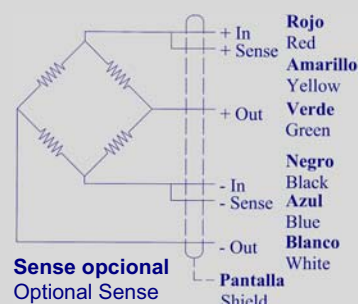

SENSOCAR
CÉLULAS DE CARGA • LOAD CELLS
ELECTRÓNICA DE PESAJE

Pol. Ind. Can Parellada C/ Géminis, 77 – 08228 Terrassa
Tel.: 34 93 780 44 99 – Fax: 34 93 780 39 72
www.sensocar.com – e-mail: sensocar@sensocar.com